

Downdraft Bench

Models DB-2000 and DB-3000

Self-contained dust collector bench used in grinding and finishing operations.




DB-3000

- Powerful downward airflow effectively captures dust and fume.
- Even air distribution provides effective dust control over the entire work surface.
- Hinged side-wing panels open to accommodate longer workpieces.
- Built-in fluorescent light illuminates work area.
- Ergonomically designed for operator comfort.
- Fibra-Web® FR filter cartridges featuring nanofiber technology provide high filtration efficiency and long filter life.
- MERV* 14 filtration efficiency rating per ASHRAE 52.2-1999.
- Productivity increases and morale improves by providing a cleaner working environment.
- Helps support OSHA Clean Air Standards.
- Quiet operation.

Downdraft Bench

Dimensions & Specifications

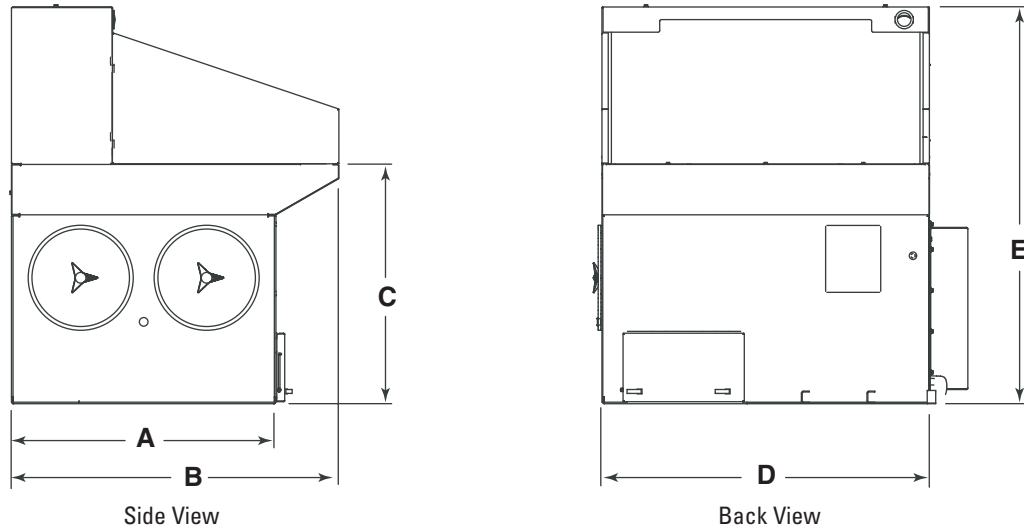

Model	Nominal Airflow** (cfm)	Filter Area (ft²)	Motor (hp)	Downdraft Velocity (fpm)	Dimensions (inches)					Dust Capacity (ft³)	Max Load per sq. ft. (lbs)	Shipping Weight (lbs)	Sound Level dB(A)†
					A	B	C	D	E				
DB-2000	2000	240-508	3	200	42.0	52.0	38.0	52.0	63.0	1.4	75	980	68
DB-3000	3000	480-1016	5	200	42.0	52.0	38.0	78.0	63.0	2.8	75	1300	72

Note: Customer must have 90 to 100 psi clean air available. Filter area depends on the type of cartridge used.

Standard Features

- Heavy-duty work surface supports 75 lb/ft²
- Automatic self-cleaning pulse jet system
- Quiet, efficient backward inclined airfoil fan
- Large capacity dust drawers
- Fibra-Web® FR cartridge
- Fluorescent light fixture
- 10-year warranty

Equipment Options

- Prewired controls with after-shift cleaning system
- Scratch-resistant work surfaces
- Variety of Torit-Built® filter cartridges

* The **Minimum Efficiency Reporting Value (MERV)** of this filter cartridge has been determined through independent laboratory testing using ASHRAE 52.2 (1999) test standards. The MERV rating was determined at a face velocity of 118 feet per minute and loading up to four inches water gauge. Actual efficiency of any filter cartridge will vary according to the specific application parameters. Dust concentration, airflow, particle characteristics, and pulse cleaning methods all affect filtration efficiency.

** Based on clean filters.

† Sound level per ANSI S12.34.1988. The actual measured sound level will vary, depending on background noise and room conditions.



Donaldson Company, Inc.


Significantly improve the performance of your collector with genuine Donaldson Torit replacement filters and parts.



PROCESS ENVIRONMENTS

Air Filtration Systems for Industry

Dust Collection • Fume Extraction • Mist Control • General Ventilation
System Design • Ductwork • Sheet Metal Fabrication
Turn-Key Installations • Replacement Parts & Filters • Maintenance Contracts

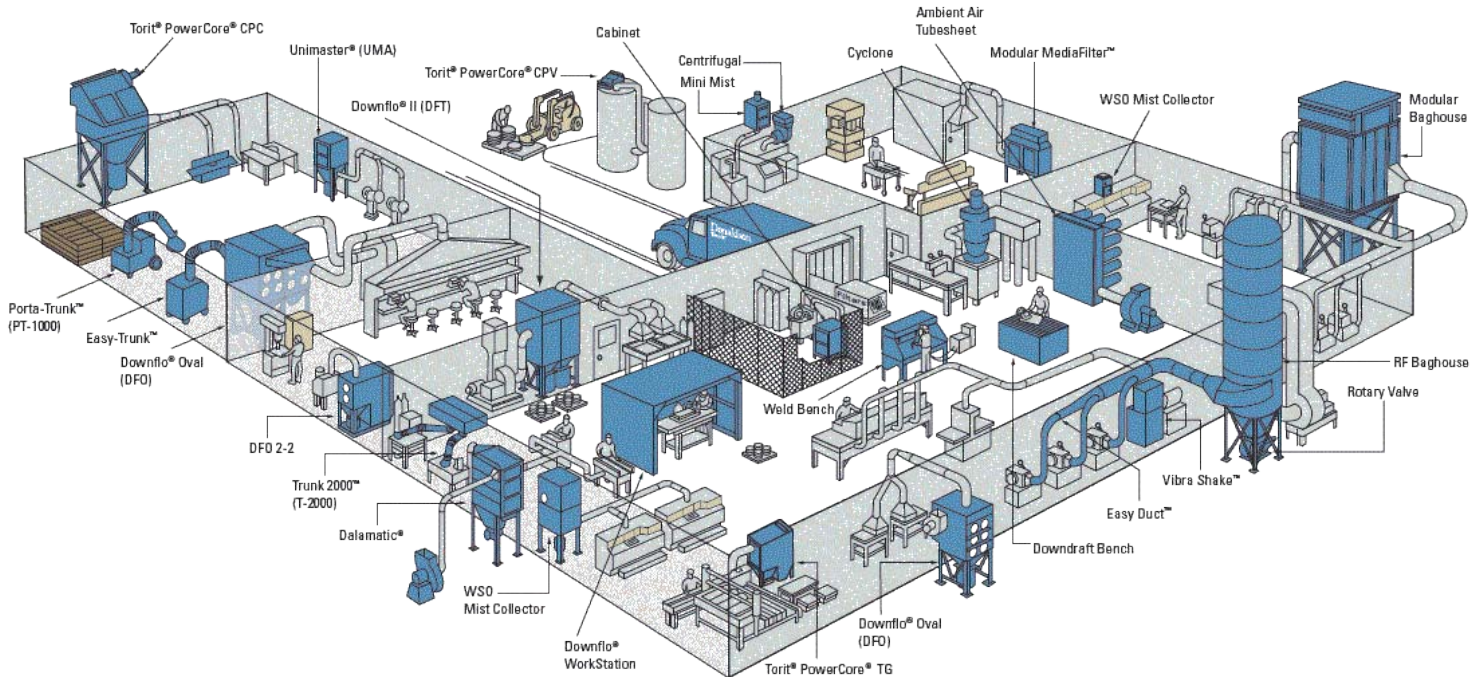

Donaldson
Torit

Industrial
Air Technology Corp.

HOUSTON • AUSTIN

CORPORATE OFFICE
406 Newport Blvd. League City, TX

Phone: (281) 316-2500 Toll Free: (800) 495-2249 Fax: (281) 526-2501

Website: www.processenvironments.com Email: peimail@processenvironments.com